
ROSE *and* THORN

FLOORING

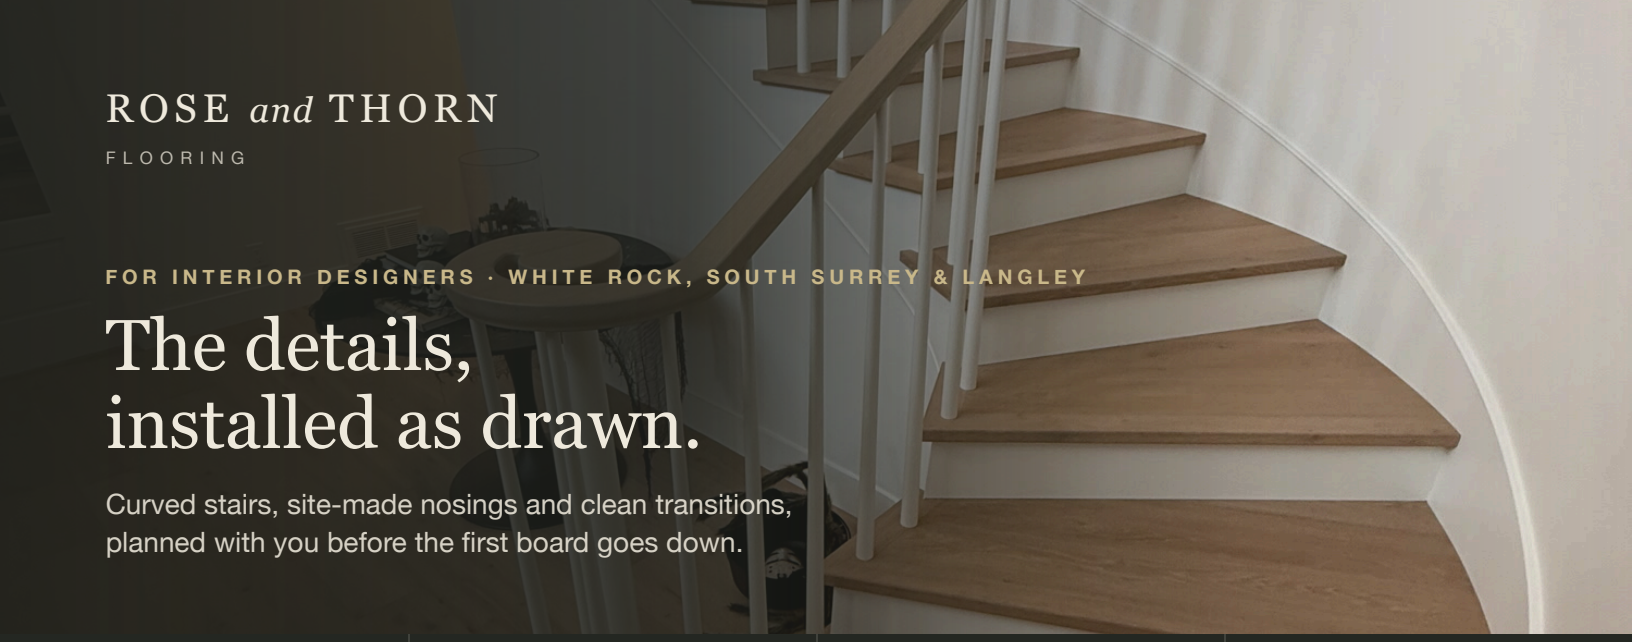

FOR INTERIOR DESIGNERS · WHITE ROCK, SOUTH SURREY & LANGLEY

The details, installed as drawn.

Curved stairs, site-made nosings and clean transitions, planned with you before the first board goes down.

2 days	1 day	3–5 days	2 years
to measure	for a written quote	for most installs	workmanship guarantee

Details we build on site

Curved and open stairs Treads, rounded nosings and returns matched to the floor	Quoted per stair
Flush floor registers Wood inserts cut from the same boards	Quoted with the floor
Transitions and thresholds Height changes, tile edges and doorways	$300 per job
Baseboards, casings, feature walls Profiles matched or specified	$5.50 / linear ft new

Final prices after we see the drawings or the space. All prices plus GST.

OUR OFFER TO YOU

Send one upcoming spec and we'll walk the stairs and transitions with you before you finalize it.

Good to know for your spec

- **Send drawings early.** We flag floor heights, stair nosings and door clearances before the material is ordered.
- **Flatness matters.** Most floors need the subfloor within 3/16 in over 10 ft. Some products need tighter.
- **Every install method.** Floating, full glue-down or nail-down, matched to the product and the home.
- **Your supplier or ours.** Install-only on your specified product, or supplied and installed.

12 years in flooring · Insured, with WorkSafeBC coverage. Carpet, tile and painting coordinated through trusted trade partners.



Rounded bottom tread



Flush register



Doorway transition



Brody Rose

Owner · Rose and Thorn Flooring

604-716-4160

Call or text · brodyrose@roseandthornflooring.com

roseandthornflooring.com · Serving White Rock, South Surrey & Langley

See our work